

GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	10 Watts
Input Voltage	120 VAC ± 10% Dedicated
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE C: POLYCARBONATE



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
Dimming Models									
10W	300mA	5 - 33 VDC	Phase Dimming	120 VAC	15W	0.12A	>0.90	77%	LC10-0300P-120-C

PRODUCT FEATURES


- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P - O/P 2kVAC
- Minimum start temp: -40°C
- Surge voltage rating: L-N 2kV
- Output Current tolerance +/- 5% @ 25°C

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) consumer limits



MECHANICAL SPECIFICATIONS: CASE STYLE C

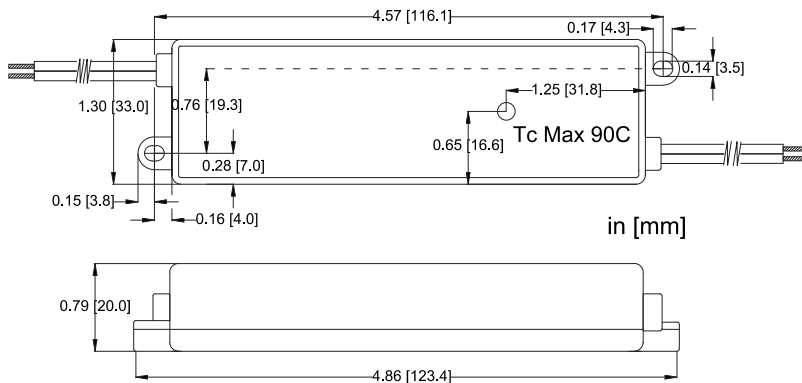

DIMENSIONS [IN/MM]

Length:	4.86 [123.4]
Mounting:	4.57 [116.1]
Width:	1.30 [33.0]
Height:	0.79 [20.0]

WIRING INFORMATION

Input:	12", Black (L), White (N) #18AWG
Output:	12", Red (+), Blue (-) #18AWG

PACKAGING INFORMATION

Weight:	4.1oz
Quantity:	40pc/carton

WARRANTY

- 5 year limited warranty

RELATED PRODUCT

- Case Style A: 2.68" x 1.29" x 0.79"


GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	10 Watts
Input Voltage	120 VAC $\pm$ 10% Dedicated
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE C: POLYCARBONATE



PERFORMANCE CURVES

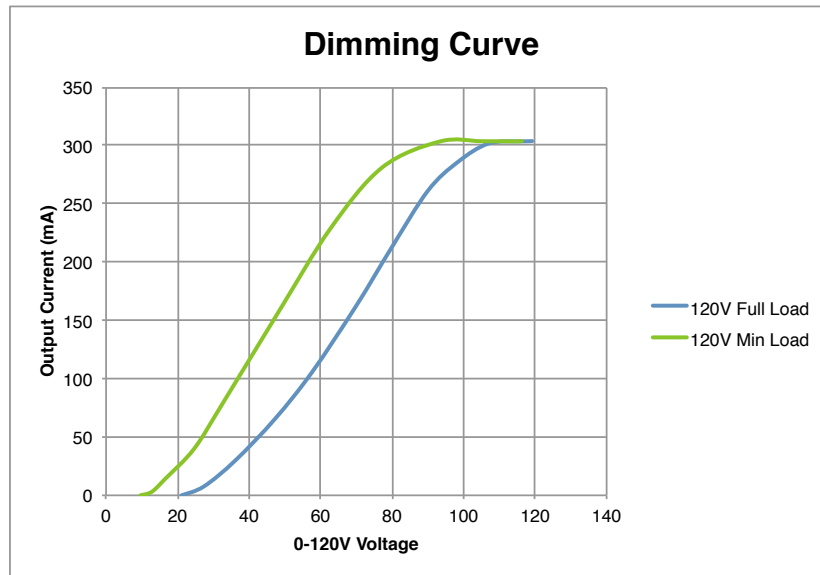

Measurements made on model LC10-0300P-120-C.