

### ELECTRONIC LOW VOLTAGE TRANSFORMER

Input Voltage	120VAC, 277VAC - 50-60Hz
Output	11.5 VAC
Enclosure Material	Aluminum
Weight	6.4 oz.
Power Factor	> 0.95
Operating Frequency	25KHz
Total Harmonic Distortion	≤ 20%
Input	6", 18AWG stranded, 105°C stripped 3/8" tinned
Output	6", 18AWG stranded, 105°C stripped 3/8" tinned

### ENVIRONMENTAL SPECIFICATIONS

Maximum Case Temperature	90°C
Minimum Starting Temperature	-30°C
Sound Rating	A+
Operating Humidity	95% relative humidity, non-condensating
Environmental Protection	Epoxy Sealed for moisture resistance and shock/vibration resistance

### PRODUCT FEATURES:

- High Reliability
- Moisture Resistant
- Emits no audible noise
- Low Harmonic Distortion
- High power factor
- Lightweight, compact design
- Small case size
- Works with most commercially available dimmers. Hardwire electronic dimmers are recommended for optimum performance.

### APPROVALS:

- Class P Type 1  
Outdoors



### ELECTRICAL FEATURES

#### Soft Start Circuitry

All models of Hatch low-voltage transformers utilize a soft start circuitry to maximize lamp life. The soft start circuit ramps up the lamp filament voltage slowly when the lamp is cold.

NOTE: Instant Start on Hot Lamp Re-Strike

#### Electronic Short Circuit Program


All Hatch low-voltage transformers employ our (ESP) Electronic Short Circuit and overload protection. The ESP sensing circuit will instantly shut down the output before any of the components are stressed if a short circuit or over load is detected. The transformer will automatically reset as soon as the fault is corrected.

### HARDWIRE ELECTRONIC


Max Watts	Min Watts	Hatch Part Number	Input Volts	Output Volts	Input Amps	Output Amps	Case Style	Safety Listing
150	10	RS12-150	120	11.5	1.25	13.05	A	UL/C-UL Recognized
		RS12-150BF					B	
		RS24-150		23.5		6.39	A	
		RS12-150-277*	277	11.5	0.55	13.05	A	
		RS12-150-277BF*					B	

\* NOTE: Must use a minimum of 20 watts when using dimmers. It is also important to confirm dimming controls compatibility with the manufacturer and your Hatch representative. 277 Volt dimming not recommended.

### DIMENSIONS:

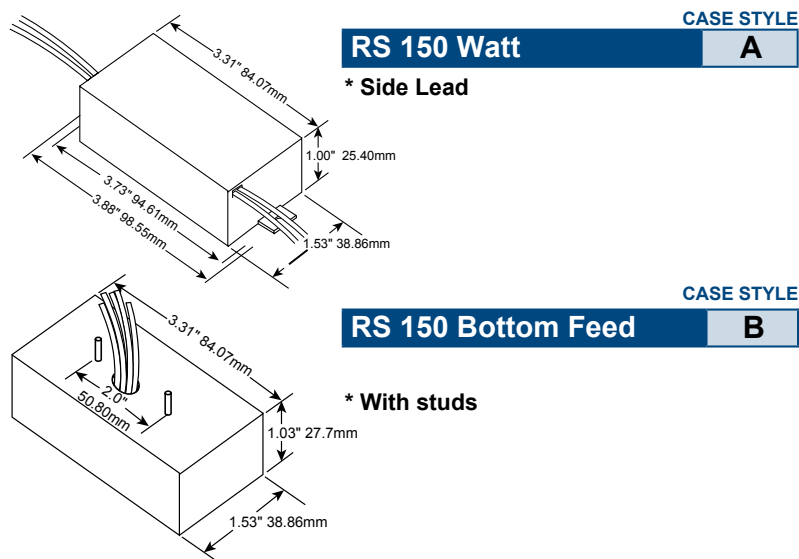

### WIRING DIAGRAM:

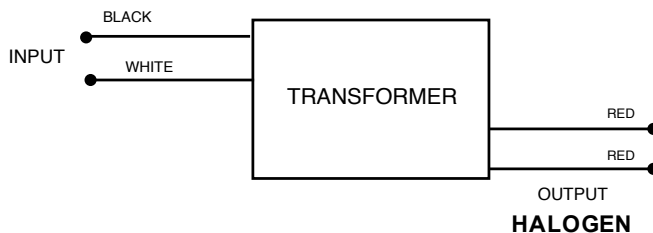

### NOTES: