

GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	4 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz

CASE STYLE: POLYCARBONATE



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Current	Power Factor	Efficiency	Hatch Part Number
4W	350mA	8-13V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	84%	LCA004-UNV
	500mA	5-9V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	77%	LCD004-UNV
	700mA	2.8-6.5V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	82%	LCB004-UNV

PRODUCT FEATURES


- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge voltage rating: L-N 2kV
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- Output Current tolerance +/- 5% @ 25°C

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- Meets FCC47 CFR Part 15 (Class A) Non-consumer limits



MECHANICAL SPECIFICATIONS

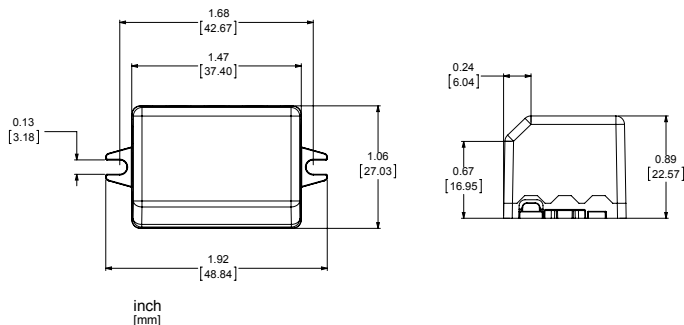

DIMENSIONS [IN/MM]

Length:	1.92 [48.8]
Mounting:	1.68 [42.7]
Width:	1.06 [27.0]
Height:	0.89 [22.6]

WIRING INFORMATION

Input:	Black (L) 6" #18AWG
	White (N) 6" #18AWG
Output:	Red (+) 6" #18AWG
	Black (-) 6" #18AWG

PACKAGING INFORMATION

Weight:	4.1oz
Quantity:	200pc/carton

WARRANTY

- 5 year limited warranty