

GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 VAC ± 10% Dedicated 120-277 VAC ± 10% Universal 347 VAC ± 10% Dedicated
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE I: METAL



ELECTRICAL SPECIFICATIONS

Watts	Output Voltage	Max Output Current	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
60W	12 VDC	5.00A	120 - 277 VAC	71W	0.65/0.28A	>0.90	85%	LV60-12N-UNV-I [®]
	12 VDC	5.00A	120 VAC	73W	0.64A	>0.90	82%	LV60-12N-120-I [®]
	12 VDC	5.00A	347 VAC	73W	0.25A	>0.90	83%	LV60-12N-347-I
	14 VDC	4.30A	120 - 277 VAC	71W	0.65/0.28A	>0.90	85%	LV60-14N-UNV-I
	24 VDC	2.50A	120 - 277 VAC	70W	0.65/0.28A	>0.90	86%	LV60-24N-UNV-I [®]
	24 VDC	2.50A	120 VAC	69W	0.64A	>0.90	87%	LV60-24N-120-I [®]

PRODUCT FEATURES


- Short circuit and overload protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge voltage rating: L-N 2kV, L/N-G 2kV
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- MTBF: 299,000 hours @ 40°C ambient (~70°C case temp)
- Inrush Current: <20A Max @230VAC for Universal input models, cold start 25°C
- Output Voltage tolerance +/- 5% @ 25°C
- 120 - 277VAC: No minimum load

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class A) Non-consumer limits
- ^SUL879 SAM approved



MECHANICAL SPECIFICATIONS: CASE STYLE I

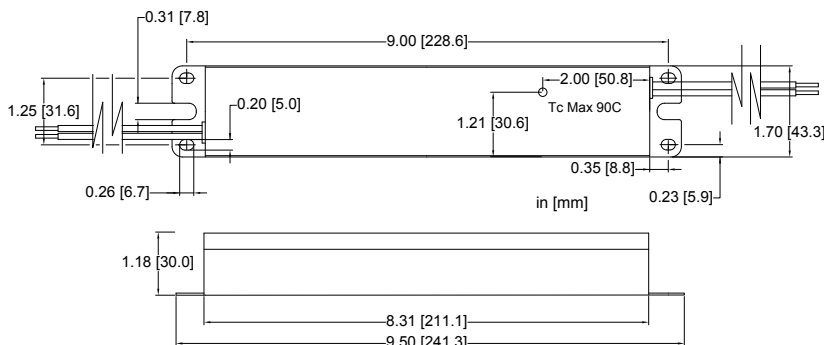

DIMENSIONS [IN/MM]

Length:	9.50 [241.3]
Mounting:	9.00 [228.6]
Width:	1.70 [43.2]
Height:	1.18 [30.0]

WIRING INFORMATION

Input:	12", Black (L), White (N) #18AWG
Output:	12", Red (+), Blue (-) #18AWG

PACKAGING INFORMATION

Weight:	21.2 oz
Quantity:	30pc/carton

WARRANTY

- 5 year limited warranty

RELATED PRODUCT

- Case Style F: 4.99" x 3.00" x 1.30"
- Case Style K: 9.50" x 3.00" x 1.35"
- Case Style R: 9.64" x 1.87" x 1.50"



GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 VAC ± 10% Dedicated 120-277 VAC ± 10% Universal 347 VAC ± 10% Dedicated
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE I: METAL



PERFORMANCE CURVES

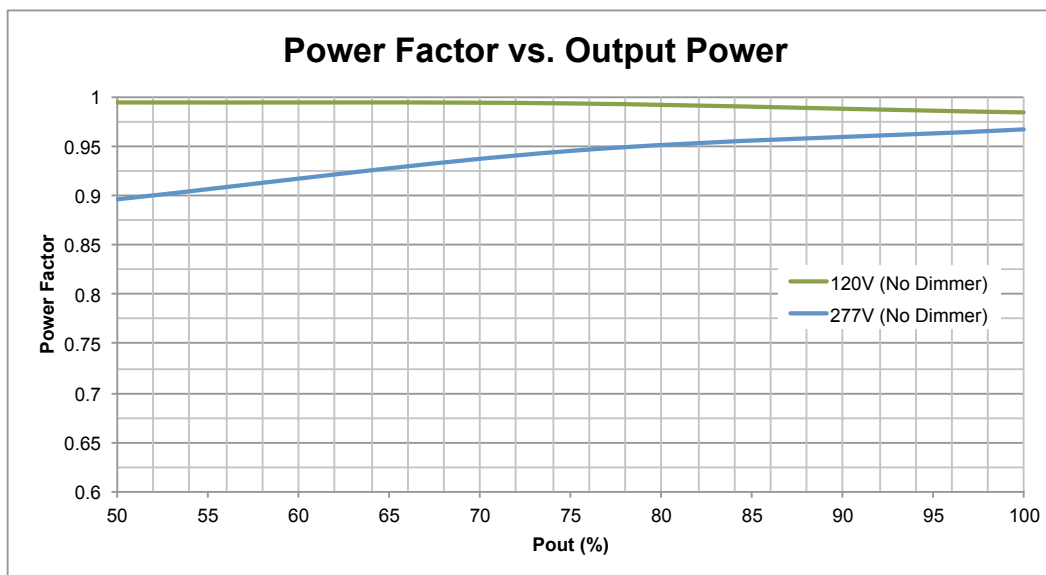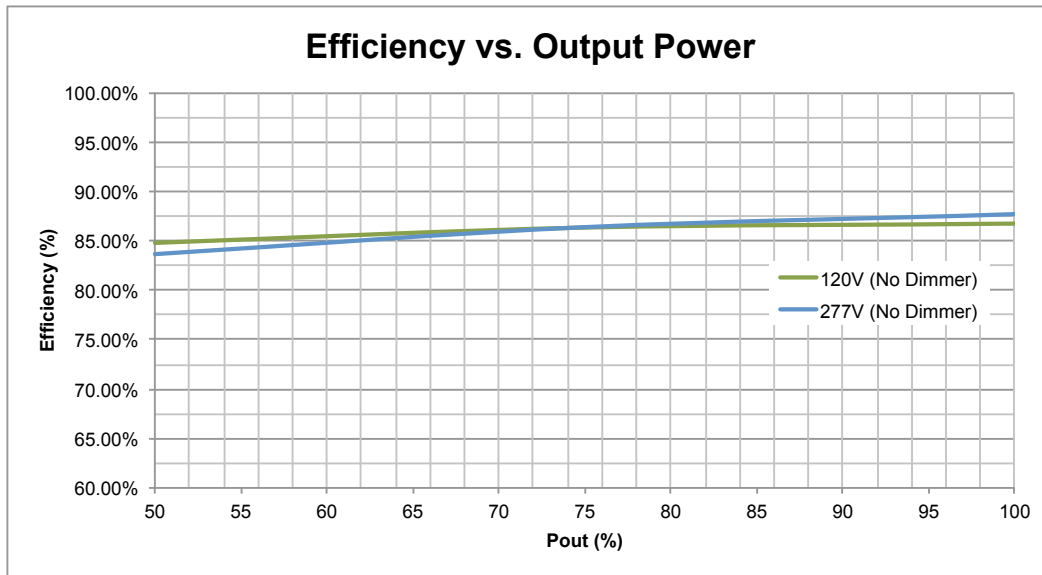

Efficiency and PF measured at 25°C.
Measurements made on model LV60-24N-UNV-I.


GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 VAC ± 10% Dedicated 120-277 VAC ± 10% Universal 347 VAC ± 10% Dedicated
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%


CASE STYLE I: METAL



PERFORMANCE CURVES

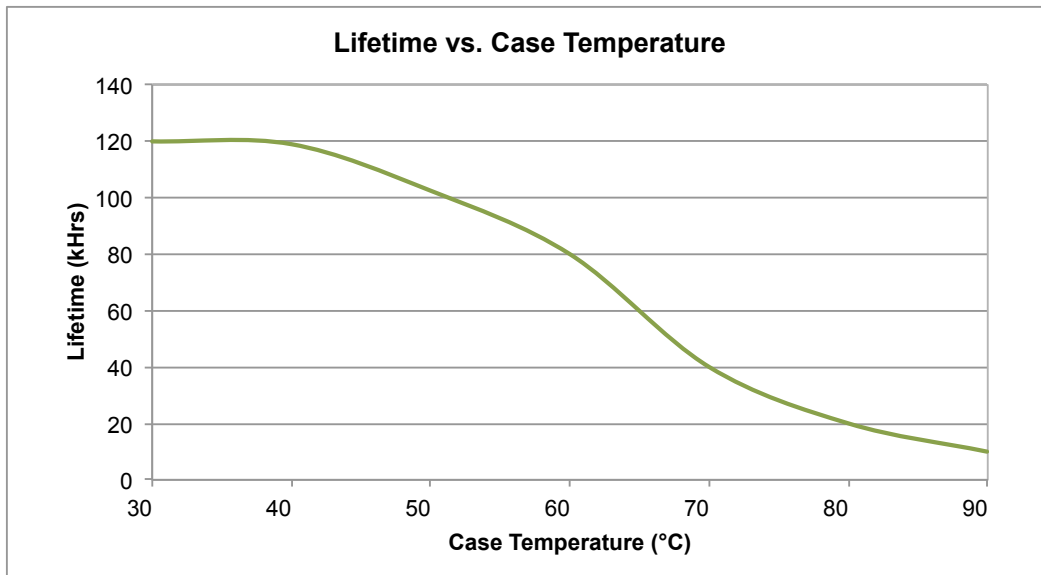

Efficiency and PF measured at 25°C.
Measurements made on model LV60-24N-UNV-I.

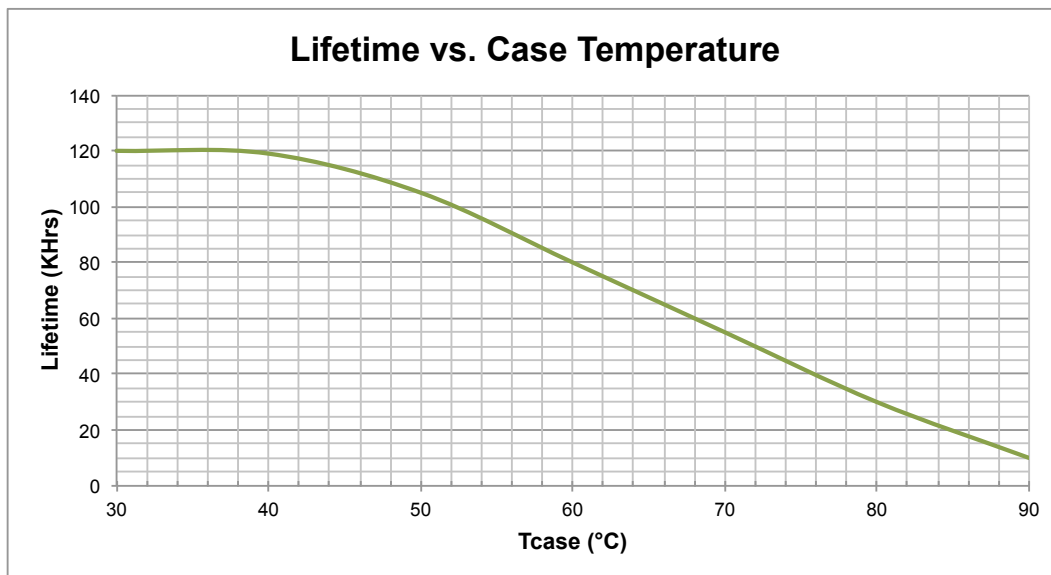

Measurements made on model LV60-12N-UNV-I.