

LSP4-UNV

LED Surge Protector

The Hatch LSP4-UNV surge protector provides single phase protection for line/neutral, line/ground and neutral/ground in accordance with IEEE C62.41 Category C High Exposure. The unit was designed to meet new design requirements for luminaires using LED light engines. The LSP4-UNV offers protection for LED luminaires in a small and convenient flat form factor. The surge protector is Type 5 SPD. Also protects Electronic Fluorescent & HID ballasts as well as all other electronic products.



SPECIFICATIONS:


Input Voltage:	120-277V (+/- 5%)		
Frequency:	50Hz-60Hz		
Maximum Continuous Voltage:	320V		
Maximum Discharge Current:	10kA (8/20µs standard wave)		
Nominal Discharge Current:	5kA		
Measured Limiting Voltage (VpK):	L-N	L-G	N-G
	1200	1320	1320
Max Case Temperature:	85°C		

Pulse Rating (8 x 20 µSec)

Surge Level	# of Strikes	
	L-N	L-G, N-G
10,000A	2	1
7,500A	4	2
5,000A	30	15
2,000A	200	100
700A	2000	1000

*1 strike at 20,000A

MECHANICAL DIMENSIONS: in [mm] † Reference Dimensions Only

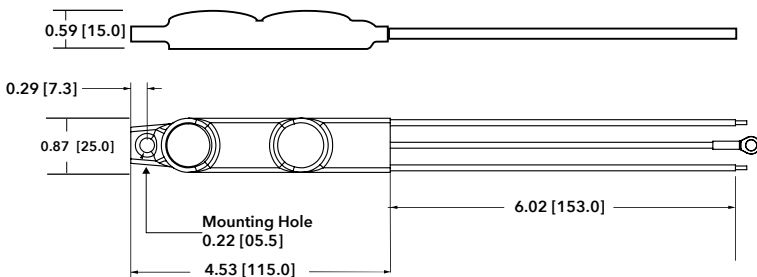

DIMENSIONS [IN/MM]

Length:	4.53 [115.0]
Mounting hole:	0.22 [5.5]
Width:	0.87 [25.0]
Height:	0.59 [15.0]

WIRING INFORMATION

Surge Protector Wires 6", Black (L), White (N), Green (G) #14 AWG


PACKAGING INFORMATION

Weight:	2.00oz
Quantity:	100pc/carton

WARRANTY

- 5 year limited warranty

WIRING DIAGRAM:

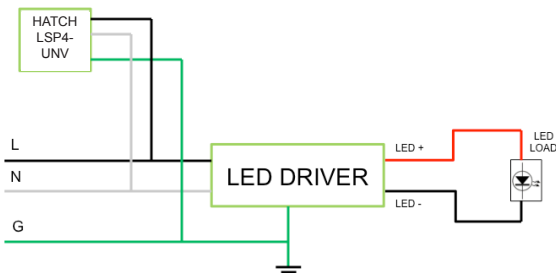

•Check with your sales person for availability.

Specifications are subject to change without notice.

The LSP4 series of surge protection devices are UL type 5 devices and are designed accordingly to meet UL1449 standard. LSP4 surge protectors are intended to be used in combination with properly rated overcurrent protection and in accordance with the intended application.