

ELECTRICAL SPECIFICATIONS

Watts	Output Voltage	Max Output Current	Input Voltage	Dimming	Input Current	Power Factor	Efficiency	Hatch Part Number
96W	24 VDC	4.00A	120VAC/277VAC	MLV TRIAC	1.33/0.55A	>0.80	72%	LV96-24T-1227-JJ

PRODUCT FEATURES


- Overload protection with reset
- Suitable for indoor and outdoor use
- Operating temperature range: -20°C to 40°C (measured at Tcase)
- Knockout wiring compartment
- For best dimming performance, use a CL-style dimmer
(Please check dimmer minimum load requirement)
- 120VAC and 277VAC tap all-in-one
- Field or factory installable unit
- No Minimum Load

APPROVALS

- UL Listed 1012/1301 (Class 2)
- Rated for Outdoor Use (Rain Tight)
Equivalent to NEMA 3R rating



MECHANICAL SPECIFICATIONS: CASE STYLE JJ

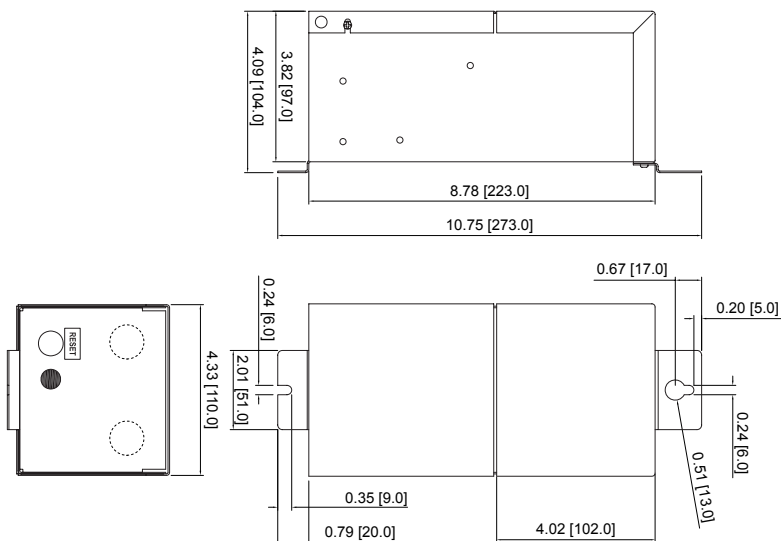

DIMENSIONS [IN/MM]

Length:	10.75 [273.0]
Mounting:	8.78 [223.0]
Width:	4.33 [110.0]
Height:	4.09 [104.0]

PACKAGING INFORMATION

Weight:	152.0 oz
Quantity:	4pc/carton

WIRING INFORMATION


Input:	6", Orange 277V (L), Black 120V (L), White (N) #18AWG
Output:	6", Red (+), Blue (-) #16AWG

CASE STYLE JJ: METAL




WIRING DIAGRAMS

120V TAP CONNECTION

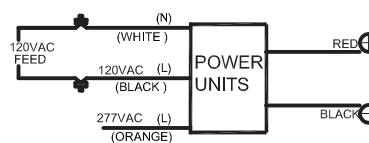

277V TAP CONNECTION

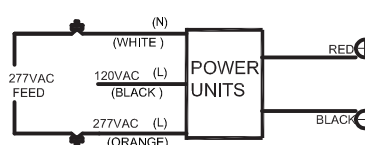

Be sure to cap off the unused input tap

WARRANTY

- 5 years limited warranty