

GENERAL INFORMATION

LED Driver Type	Constant Current
Maximum Wattage	100 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE I: METAL



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number	
Non-Dimming Models										
100W	530mA	94-189 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-0530N-UNV-I	
	600mA	83-167 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-0600N-UNV-I	
	700mA	72-143 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-0700N-UNV-I	
	800mA	63-125 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-0800N-UNV-I	
	900mA	56-111 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-0900N-UNV-I	
	1000mA	50-100 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-1000N-UNV-I	
	1050mA	48-95 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-1050N-UNV-I	
	*2000mA	17-50 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-2000N-UNV-I	
	*2100mA	24-48 VDC	Non-Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	92%	LC100-2100N-UNV-I	
	Dimming Models									
	530mA	94-189 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-053Z-UNV-I	
	600mA	83-167 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-0600Z-UNV-I	
	700mA	72-143 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-0700Z-UNV-I	
	800mA	63-125 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-0800Z-UNV-I	
900mA	56-111 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-0900Z-UNV-I		
1000mA	52-104 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	91%	LC100-1000Z-UNV-I		
1050mA	48-95 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	90%	LC100-1050Z-UNV-I		
*2000mA	17-50 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	90%	LC100-2000Z-UNV-I		
*2100mA	24-48 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	90%	LC100-2100Z-UNV-I		
*2750mA	18-36 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	89%	LC100-2750Z-UNV-I		
*2800mA	17-35 VDC	0-10V Dimming	120-277 VAC	108W	1.04/0.47A	>0.99	89%	LC100-2800Z-UNV-I		

*Class 2 US ONLY

**Class 2

† Class P

PRODUCT FEATURES

- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge rating: 2.5kV L-N, L/N-GND
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- MTBF: 170,000 hours at 40°C ambient (~70°C Case temp)
- Inrush Current: <20A Max @230VAC, cold start 25°C
- Output Current tolerance +/- 5% @ 25°C
- 0-10V dimming range: 10%-100%

APPROVALS

- UL 8750 recognized component
- UL 8750 Class P
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) Consumer limits




**TYPE
HL**

LED Driver Type	Constant Current
Maximum Wattage	100 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%



MECHANICAL SPECIFICATIONS: CASE STYLE I

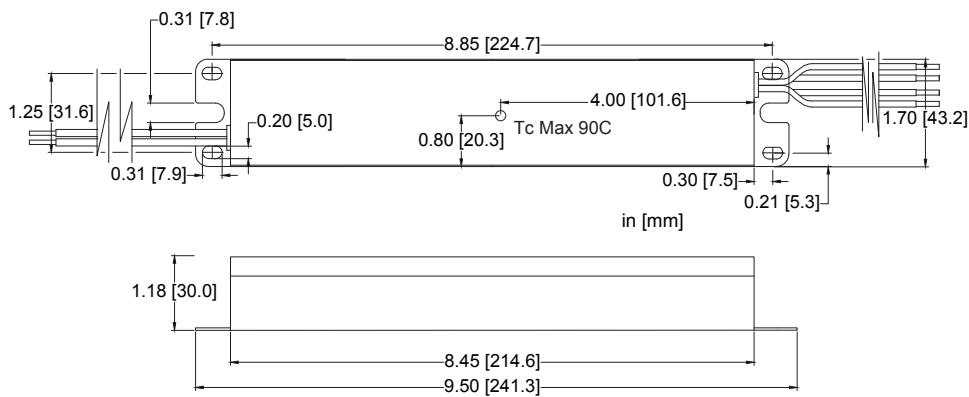

DIMENSIONS [IN/MM]

Length:	9.50 [241.3]
Mounting:	8.85 [224.7]
Width:	1.70 [43.2]
Height:	1.18 [30.0]

WIRING INFORMATION

Input:	12", Black (L), White (N) 18AWG
Output:	12", Red (+), Blue (-) #22AWG
Dimming:	12", Purple (+), Grey (-) # 22AWG

PACKAGING INFORMATION

Weight:	21.2 oz
Quantity:	30pc/carton

WARRANTY

- 5 year limited warranty



GENERAL INFORMATION

LED Driver Type	Constant Current
Maximum Wattage	100 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE I: METAL



PERFORMANCE CURVES

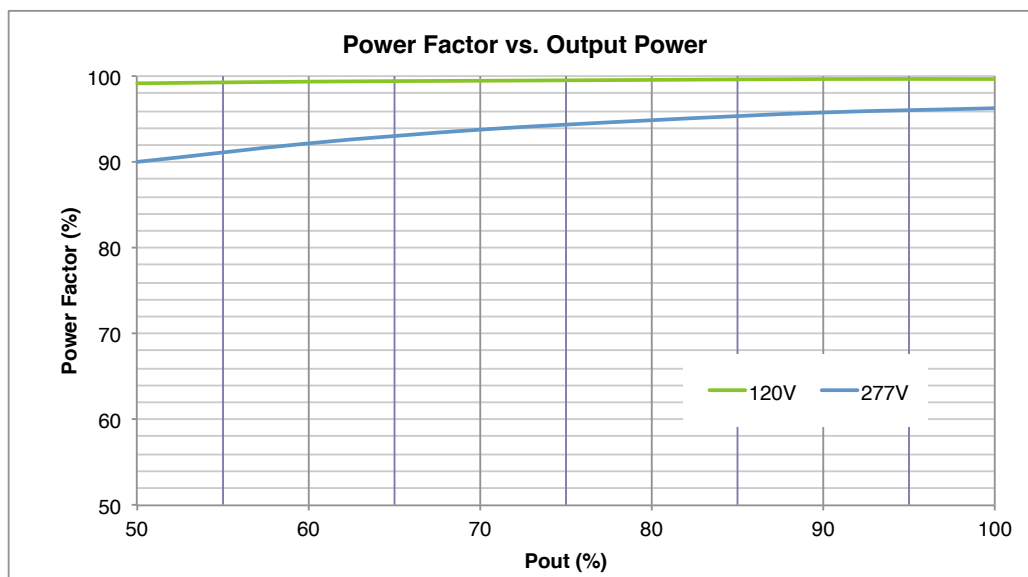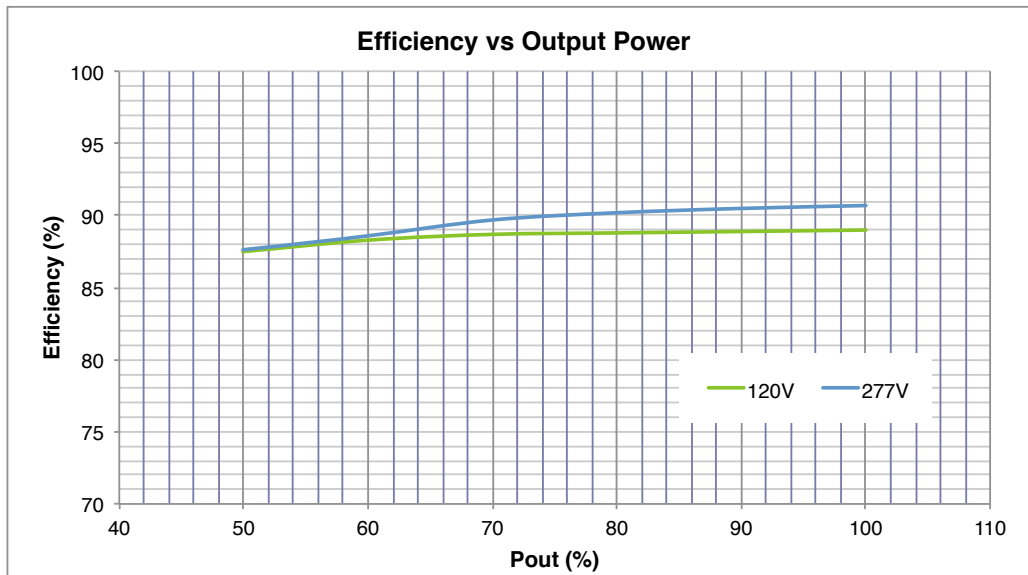

THD, PF and efficiency measured at 25°C.
Measurements made on model LC100-2100Z-UNV-I.



GENERAL INFORMATION

LED Driver Type	Constant Current
Maximum Wattage	100 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE I: METAL



PERFORMANCE CURVES

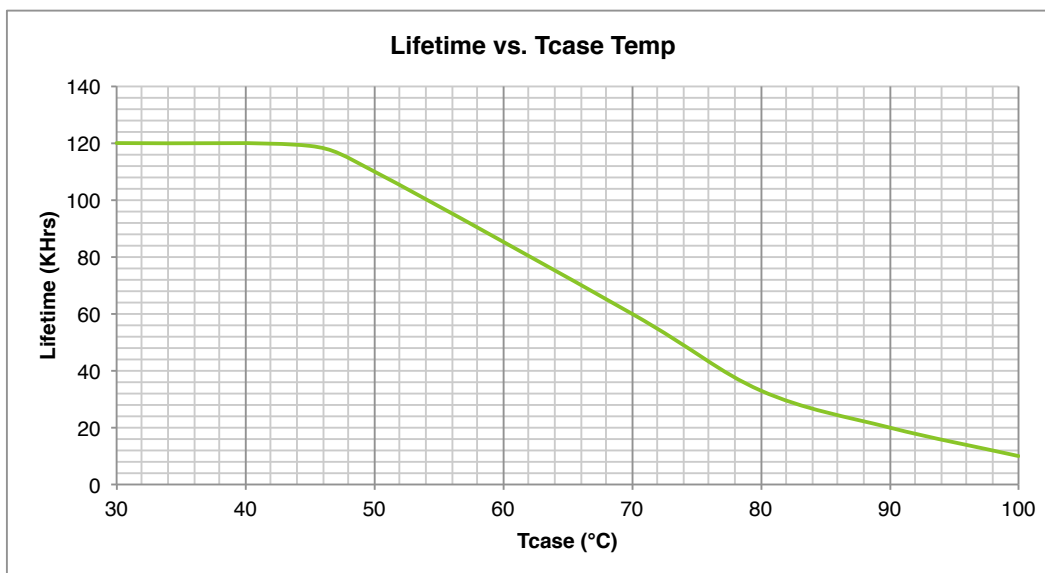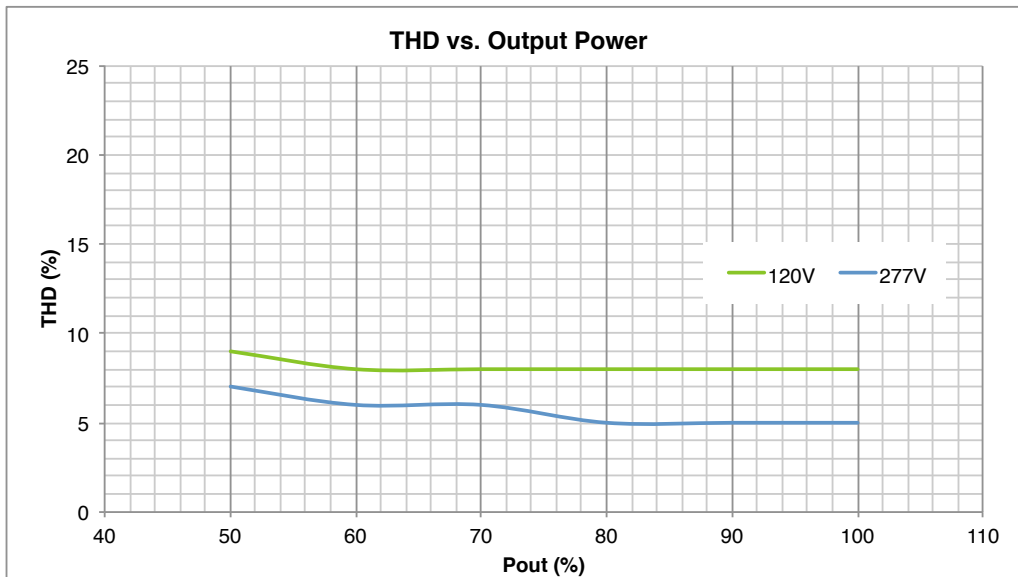

THD, PF and efficiency measured at 25°C.
Measurements made on model LC100-2100Z-UNV-I.