

# LC SERIES

CONSTANT CURRENT LED DRIVERS

## CONSTANT CURRENT LED DRIVER CASE STYLE D: METAL



### GENERAL INFORMATION

LED Drive Type	Constant Current Class 2
Maximum Wattage	16W
Input Voltage	120VAC (+/-10%) or 120-277VAC (+/-10%)
Input Frequency	50/60Hz
Power Factor @ Full Load	>0.9
Efficiency @ Full Load	Up to 83% (See Chart Below)
THD	<20%
Start-Up Time	<750ms
Output Current Tolerance	5%
Line Regulation	1%
Load Regulation (Max Load)	2%
Dimming	Phase or Non-dimming
Output Over Current Protection	Hiccup Mode
Output Short-Circuit Protection	Hiccup Mode
Over Temperature Protection	Hiccup Mode
EMI Compliance	FCC Part 15 Class B

### ENVIRONMENTAL SPECIFICATIONS

Minimum Operating Temp.	-40° C
Maximum Case Temp.	+90° C
Maximum Storage Temp.	+85° C
Maximum Relative Humidity	95% Non-condensing
Transient Protection	2kV L-N, 4kV L/N-GND
UL Environment Rating	Dry and Damp
Sound Rating	Class A

### APPROVALS



### WARRANTY

- 5 year limited warranty

### ELECTRICAL SPECIFICATIONS


Max. Power	Rated Current	Output Voltage (VDC)	Input Voltage	Dimming Type	Input Power	Input Current	Efficiency	Part Number
16W	Non-Dimming							
	500mA	10 - 32 VDC	120 - 277 VAC	Non-Dimming	20W	0.19/ 0.09A	83%	LC16-0500N-UNV-D
	Dimming							
	350mA	15 - 46 VDC	120 VAC	Phase Dimming	20W	0.18A	81%	LC16-0350P-120-D
700mA	8 - 23 VDC	LC16-0700P-120-D						

Custom output current available on Made to Order basis

# LC SERIES

CONSTANT CURRENT LED DRIVERS

## SIZING INFORMATION: CASE STYLE D

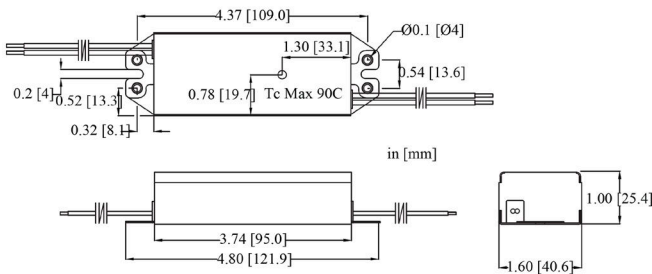

Specifications subject to change without notice.

## WIRING INFORMATION



<b>Input</b>	12", Black (L), White (N) #18AWG
<b>Output</b>	12", Red (+), Blue (-) #18AWG

## PACKAGING INFORMATION

<b>Package Weight</b>	8.3oz
<b>Quantity</b>	60pcs/carton

## PERFORMANCE CURVES

### Efficiency Vs. Output Power

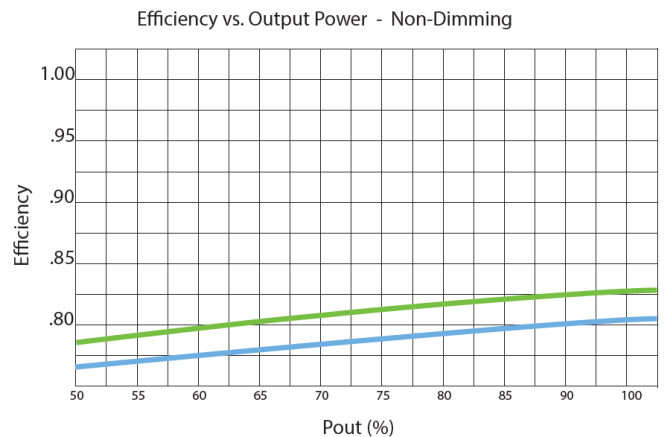
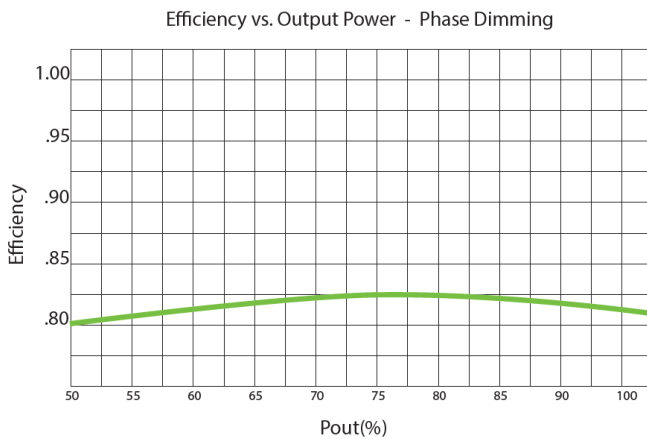


# LC SERIES


CONSTANT CURRENT LED DRIVERS

## PERFORMANCE CURVES

### Power Factor Vs. Output Power

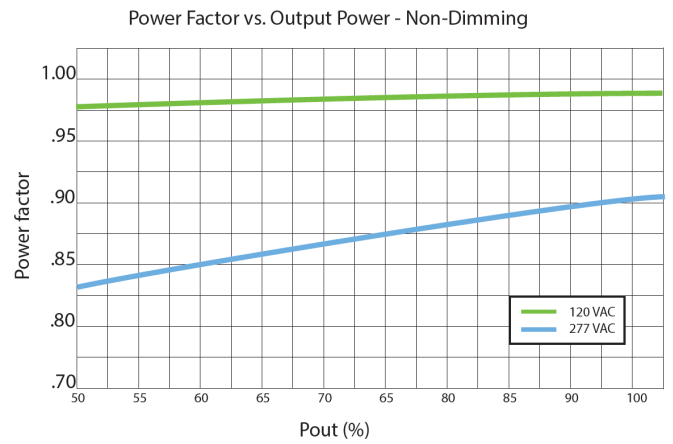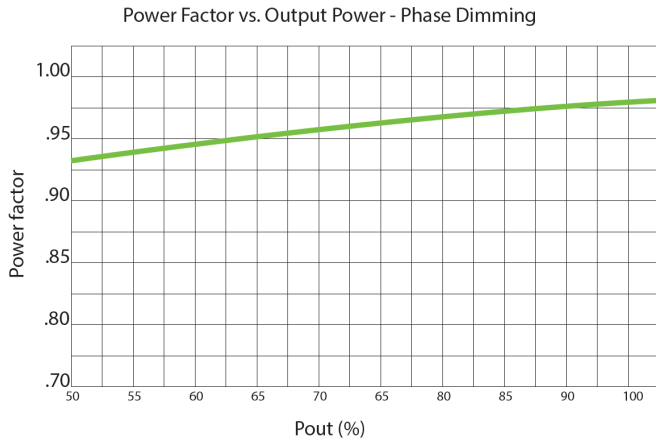

### Dimming Curve

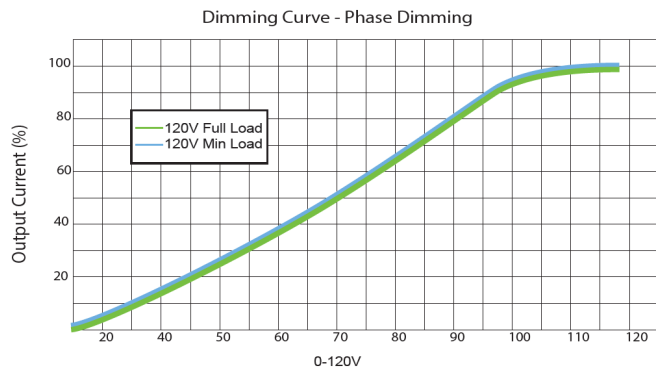

### Lifetime Vs. Case Temperature

