

# LC SERIES

CONSTANT CURRENT LED DRIVERS

## CONSTANT CURRENT LED DRIVER CASE STYLE: POLYCARBONATE



### GENERAL INFORMATION

LED Drive Type	Constant Current Class 2
Maximum Wattage	4W
Input Voltage	120-277 (+/- 10%)
Input Frequency	50/60 Hz
Power Factor @ Full Load	<0.4
Efficiency @ Full Load	Up to 84% (See chart)
Start-Up Time	<100ms
Output Current Tolerance	5%
Line Regulation	5%
Load Regulation (Max Load)	1%
Dimming	Non-Dimming
Output Over Current Protection	Hiccup Mode
Output Short-Circuit Protection	Auto-Recovery
EMI Compliance	FCC Part 15 Class A

### ENVIRONMENTAL SPECIFICATIONS

Minimum Operating Temp.	-40° C
Maximum Case Temp.	+90° C
Maximum Storage Temp.	+85° C
Maximum Relative Humidity	95% Non-condensing
Transient Protection	2kV
UL Environment Rating	Dry and Damp
Sound Rating	Class A

### APPROVALS



### WARRANTY

- 5 year limited warranty

### ELECTRICAL SPECIFICATIONS


Max. Power	Rated Current	Output Voltage (VDC)	Input Voltage	Dimming Type	Input Current	Power Factor	Efficiency	Part Number
4W	350mA	8-13V	120-277 VAC	Non-Dimming	0.09-0.05A	>0.40	84%	LCA004-UNV
	500mA	5-9V					77%	LCD004-UNV
	700mA	2.8-6.5V					82%	LCB004-UNV

Custom output current available on Made to Order basis

# LC SERIES

CONSTANT CURRENT LED DRIVERS

## SIZING INFORMATION

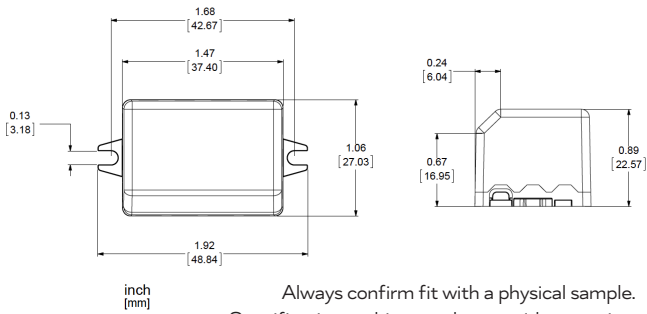

## WIRING INFORMATION

<b>Input</b>	6" Black (L), White (N) #18AWG
<b>Output</b>	6" Red (+), Black (-) #18AWG

## PACKAGING INFORMATION

<b>Package Weight</b>	4.1 oz
<b>Quantity</b>	200 pcs/carton

## PLOT DATA

